




DATA SHEET

Main

Product range:	External Lid
System Wiring Installation:	Cable Trunking
Product or component type:	Canal de cabluri pt. instalare
Material trunking:	PVC-Pb Free
Trunking size:	40x25
impact resistance:	2 J (IK07)
flame retardant:	flame retardant
Electrical continuity:	without electrical continuity
Insulating properties:	with insulating properties
Degree of protection:	IP20B
Rated voltage:	400 V
Fire reaction class of underlying material :	A1-F
Inside area (mm²)	560 mm²
Mechanical protection :	IK07
The ambient temperature of use:	-5...60 °C

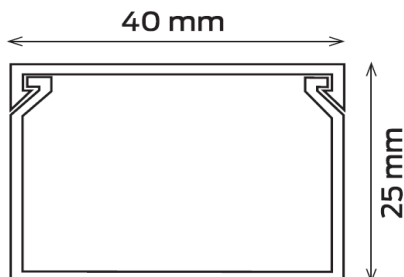

Tint:	MAHOGANY WITH DRAWING
Installation method:	With screws
Material :	PVC (polyvinyl chloride)

Standards:	SR EN 50085-1
	SR EN 50085-2-1
	SR EN 50085-2-1.A1
	SR EN 50085-2-2
	SR EN 50085-2-3
	SR EN 50085-2-4

General tests:

OICPE (ELECTRIC PRODUCTS CERTIFICATION INDEPENDENT BODY)
ROMANIA RENAR
SR EN ISO/CEI 17065:2013

PRODUCT:	40x25 Cable Trunk Adhesive Type
Color:	MAHOGANY WITH DRAWING
Adhesive:	34 mm
Height (mm):	2000±10
Weight (g):	430gr±10gr
Thickness (mm):	0,9±0,03
Height (mm):	25±0,03
Width (mm):	40±0,03