
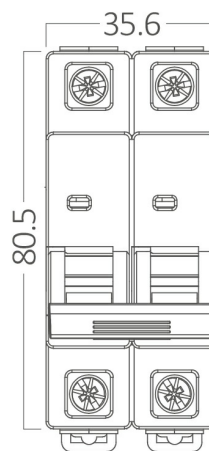
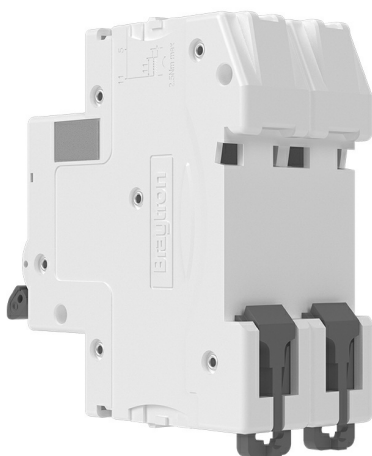


# Braytron

## FISA TEHNICA

MODEL BY80-01250

DESCRIEREA BRY-BMG2-2 C50-50A-2P C TYPE 6KA-MCB

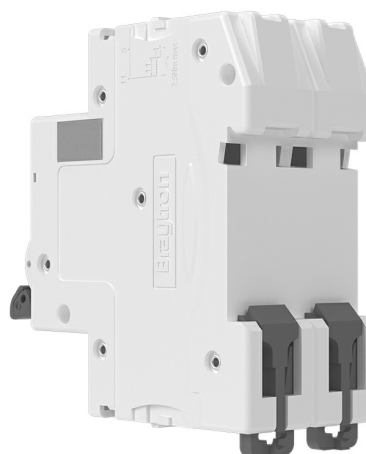

BRAYTRON SRL

Bulavardul Iuliu Maniu, Nr.616, Sector 6, 061129, Bucuresti-  
ROMANIA

info@braytron.com

www.braytron.com

SPOTVISION ELECTRIC & LIGHTING S.R.L

Bulavardul Iuliu Maniu, Nr.616, Sector 6, 061129, Bucuresti-  
ROMANIA

sales@spotvisionelectric.ro

www.spotvisionelectric.ro

Page 1-2

## Caracteristici Generale

|                               |   |                |
|-------------------------------|---|----------------|
| Model                         | : | BY80-01250     |
| Familia principală/Categorie  | : | Electrical     |
| Sub-familia/Subcategorie      | : | MCB            |
| Tip                           | : | BMG2-2 C50 MCB |
| Culoarea corpului             | : | Alb            |
| Garanție                      | : | 5 ani          |
| IP (Grad da protecție)        | : | IP20           |
| Poles                         | : | 2P             |
| The Number of Protected Poles | : | 2              |

## Caracteristici electrice

|                          |   |               |
|--------------------------|---|---------------|
| Tensiune                 | : | 415V          |
| Temperatura de lucru     | : | -5°C +40°C    |
| Frecvență                | : | 50/60 Hz      |
| Current                  | : | 50A           |
| Network Type             | : | AC Type       |
| Nominal Working Voltage  | : | 415V~ 50/60Hz |
| Breaking Capacity        | : | 6kA           |
| Rated Insulation Voltage | : | 4000V         |

## Informații despre ambalaj

|                           |   |               |
|---------------------------|---|---------------|
| Greutate netă             | : | 10,80 kgs     |
| Greutate brută            | : | 11,90 kgs     |
| Bucăți pe cutie (PCS/CTN) | : | 60 pcs        |
| Lungime                   | : | 420 mm        |
| Lățime                    | : | 230 mm        |
| Înălțime                  | : | 185 mm        |
| Cod EAN                   | : | 5949097745010 |

## Product Characteristics

|                            |   |                      |
|----------------------------|---|----------------------|
| Tripping Curve             | : | C                    |
| Suitability for Insulation | : | Yes IEC/EN60898-1    |
| Contact Position Indicator | : | Yes                  |
| Connection                 | : | 1-25 mm <sup>2</sup> |
| Tightening Torque          | : | 2 Nm                 |
| Relative Humidity          | : | 0.95                 |
| Terminal Screw             | : | M5                   |
| Mounting Type              | : | Plug-in              |
| Mounting Support           | : | DIN Rail             |

## Dimensions & Weight

|          |   |         |
|----------|---|---------|
| Lungime  | : | 80,5 mm |
| Lățime   | : | 35,6 mm |
| Greutate | : | 180 gr  |