
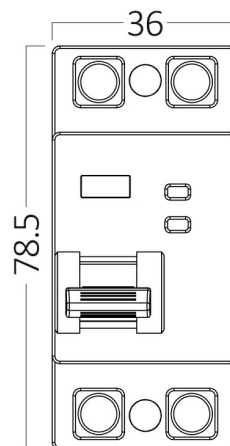
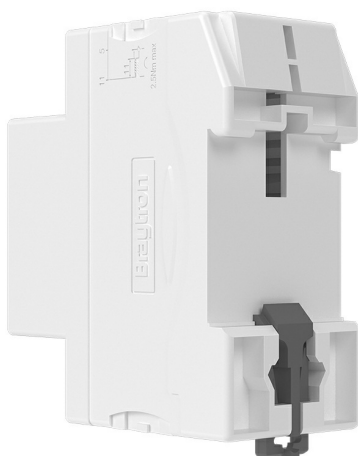


Braytron

FISA TEHNICA

MODEL BY80-06225

DESCRIEREA BRY-BRG3-2 30 25-25A-300mA 2P 10KA RCCB

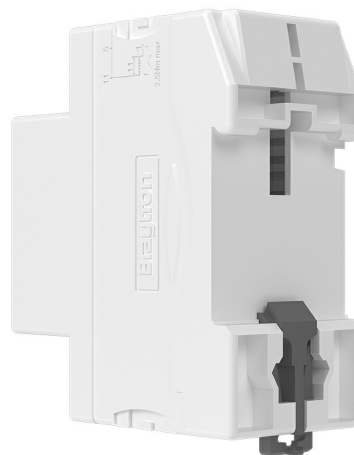

BRAYTRON SRL

Bulavardul iuliu maniu, Nr.616, Sector 6, 061129, Bucuresti-
ROMANIA

info@braytron.com

www.braytron.com

SPOTVISION ELECTRIC & LIGHTING S.R.L

Bulavardul iuliu maniu, Nr.616, Sector 6, 061129, Bucuresti-
ROMANIA

sales@spotvisionelectric.ro

www.spotvisionelectric.ro

Page 1-2

Caracteristici Generale

Model	:	BY80-06225
Familia principală/Categorie	:	Electrical
Sub-familia/Subcategorie	:	RCCB
Tip	:	BRG3-2 30 25 RCCB
Culoarea corpului	:	Alb
Garanție	:	5 ani
IP (Grad da protecție)	:	IP20
Poles	:	2P
The Number of Protected Poles	:	2

Caracteristici electrice

Tensiune	:	240V
Temperatura de lucru	:	-5°C +40°C
Frecvență	:	50/60 Hz
Current	:	25A
Network Type	:	AC Type
Breaking Capacity	:	10kA
Rated Insulation Voltage	:	690V
Rated Impulse Withstand Voltage	:	4kV
Rated current of the circuit	:	10kA
Rated residual operating current	:	300mA
Tripping current	:	500A

Informații despre ambalaj

Greutate netă	:	9,90 kgs
Greutate brută	:	10,80 kgs
Bucăți pe cutie (PCS/CTN)	:	60 pcs
Lungime	:	420 mm
Lățime	:	230 mm
Înălțime	:	185 mm
Cod EAN	:	5949097745676

Product Characteristics

Tripping Curve	:	AC
Suitability for Insulation	:	Yes IEC/EN61008-1
Contact Position Indicator	:	Yes
Connection	:	1-25 mm ²
Tightening Torque	:	2.5 Nm
Relative Humidity	:	0.95
Terminal Screw	:	M6
Mounting Type	:	Plug-in
Mounting Support	:	DIN Rail

Dimensions & Weight

Lungime	:	78,5 mm
Lățime	:	36 mm
Greutate	:	165 gr