
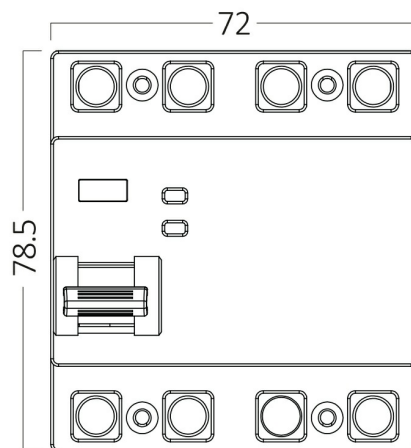
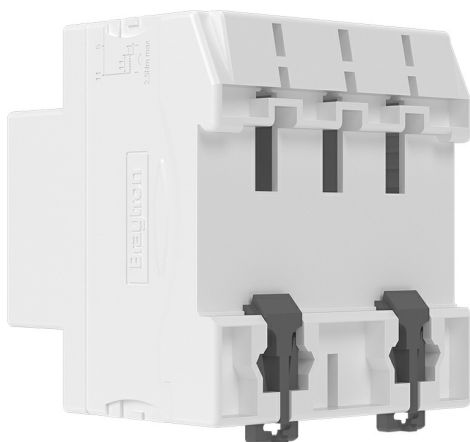
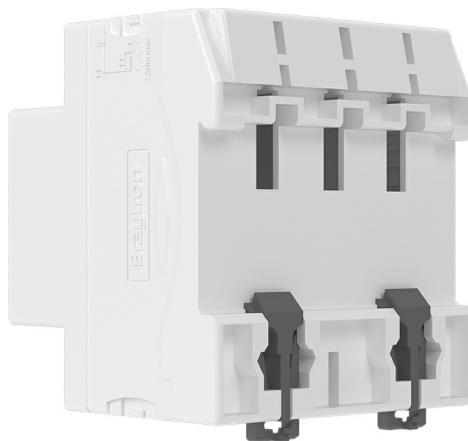


Braytron

FISA TEHNICA

MODEL BY80-07425

DESCRIEREA BRY-BRG3-4 50 25-25A-500mA 4P 10KA RCCB

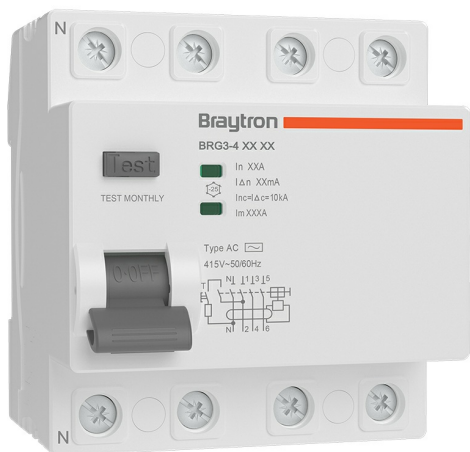

BRAYTRON SRL

Bulavardul iuliu maniu, Nr.616, Sector 6, 061129, Bucuresti-
ROMANIA

info@braytron.com

www.braytron.com

SPOTVISION ELECTRIC & LIGHTING S.R.L

Bulavardul iuliu maniu, Nr.616, Sector 6, 061129, Bucuresti-
ROMANIA

sales@spotvisionelectric.ro

www.spotvisionelectric.ro

Page 1-2

Caracteristici Generale

Model	:	BY80-07425
Familia principală/Categorie	:	Electrical
Sub-familia/Subcategorie	:	RCCB
Tip	:	BRG3-4 50 25 RCCB
Culoarea corpului	:	Alb
Garanție	:	5 ani
IP (Grad da protecție)	:	IP20
Poles	:	4P
The Number of Protected Poles	:	4

Caracteristici electrice

Tensiune	:	415V
Temperatura de lucru	:	-5°C +40°C
Frecvență	:	50/60 Hz
Current	:	25A
Network Type	:	AC Type
Breaking Capacity	:	10kA
Rated Insulation Voltage	:	690V
Rated Impulse Withstand Voltage	:	4kV
Rated current of the circuit	:	10kA
Rated residual operating current	:	500mA
Tripping current	:	500A

Informații despre ambalaj

Greutate netă	:	8,10 kgs
Greutate brută	:	9,05 kgs
Bucăți pe cutie (PCS/CTN)	:	30 pcs
Lungime	:	420 mm
Lățime	:	230 mm
Înălțime	:	185 mm
Cod EAN	:	5949097745812

Product Characteristics

Tripping Curve	:	AC
Suitability for Insulation	:	Yes IEC/EN61008-1
Contact Position Indicator	:	Yes
Connection	:	1-25 mm ²
Tightening Torque	:	2.5 Nm
Relative Humidity	:	0.95
Terminal Screw	:	M6
Mounting Type	:	Plug-in
Mounting Support	:	DIN Rail

Dimensions & Weight

Lungime	:	78,5 mm
Lățime	:	72 mm
Greutate	:	270 gr