

# Braytron



FISA TEHNICA

MODEL

BY80-02125

DESCRIEREA

BRY-BMG1-D B25-25A-1P+N B TYPE 4.5KA-MCB

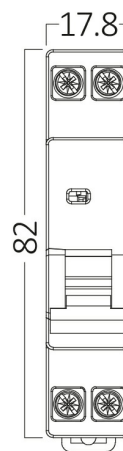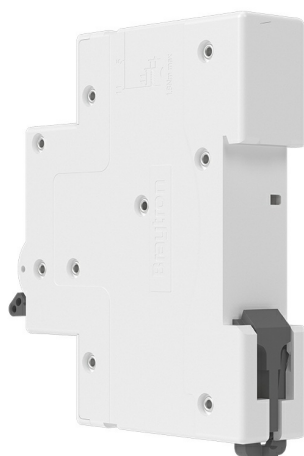

BRAYTRON SRL

Bulavardul iuliu maniu, Nr.616, Sector 6, 061129, Bucuresti-  
ROMANIA

info@braytron.com

www.braytron.com

SPOTVISION ELECTRIC & LIGHTING S.R.L

Bulavardul iuliu maniu, Nr.616, Sector 6, 061129, Bucuresti-  
ROMANIA

sales@spotvisionelectric.ro

www.spotvisionelectric.ro

Page 1-2

## Caracteristici Generale

|                               |   |                |
|-------------------------------|---|----------------|
| Model                         | : | BY80-02125     |
| Familia principală/Categorie  | : | Electrical     |
| Sub-familia/Subcategorie      | : | MCB            |
| Tip                           | : | BMG1-D B25 MCB |
| Culoarea corpului             | : | Alb            |
| Garanție                      | : | 5 ani          |
| IP (Grad da protecție)        | : | IP20           |
| Poles                         | : | 1P+N           |
| The Number of Protected Poles | : | 1              |

## Caracteristici electrice

|                          |   |               |
|--------------------------|---|---------------|
| Tensiune                 | : | 240V          |
| Temperatura de lucru     | : | -5°C +40°C    |
| Frecvență                | : | 50/60 Hz      |
| Current                  | : | 25A           |
| Network Type             | : | AC Type       |
| Nominal Working Voltage  | : | 240V~ 50/60Hz |
| Breaking Capacity        | : | 4.5kA         |
| Rated Insulation Voltage | : | 4000V         |

## Informații despre ambalaj

|          |   |               |
|----------|---|---------------|
| Lungime  | : | 420 mm        |
| Lățime   | : | 230 mm        |
| Înălțime | : | 185 mm        |
| Cod EAN  | : | 5949097745430 |

## Product Characteristics

|                            |   |                   |
|----------------------------|---|-------------------|
| Tripping Curve             | : | B                 |
| Suitability for Insulation | : | Yes IEC/EN60898-1 |
| Contact Position Indicator | : | Yes               |
| Relative Humidity          | : | 0.95              |
| Terminal Screw             | : | M4                |
| Mounting Type              | : | Plug-in           |
| Mounting Support           | : | DIN Rail          |

## Dimensions & Weight

|         |   |         |
|---------|---|---------|
| Lungime | : | 82 mm   |
| Lățime  | : | 17,8 mm |